## Sieve Shaker

## Standard features include:

- Ro-tap type shaker has excellent separating capabilities by rotating very gently.
- Noiseless and light, with uniform mechanical motion.
- Adopting non-mechanical gear system, no lubrication is required.
- Offers excellent separating and sieving performance.
- Designed to install and remove sieves easily.




## **SPECIFICATIONS**

Model		J-SRT
Shaking Type		Ro-tap type
Overall Size (mm) W x D x H		680 x 530 x 670
Ro-tap speed		240 rpm
Hammer Speed (up/down)		130 rpm
Motor Hp		1/3 Hp
Timer		60 minutes
Material	Body	Steel plate with powder coated finish
	Sieve	Brass or stainless steel plate
Power source & consumption		AC 240V 50Hz 1 phase
Weight (kg)		75.2
Sieve (option)	Size - Dia x H (mm)	203 x 41
	Quantity	6 each



Laboratory Equipment Pty Ltd email: sales@labec.com.au Ph: 02 9560 2811 • Fax: 02 9560 6131 www.labec.com.au

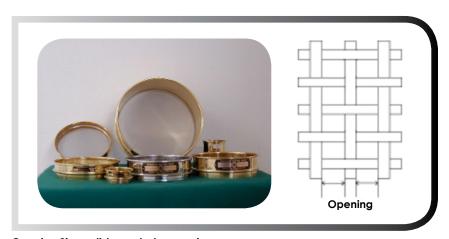

Opening Size = distance between wires

Sieve				
Size - Dia x H (mm)		203 x 41		
Material	Frame	Brass		
Wateriai	Screen	Stainless Steel		

Model No.	Opening Size
6.35	6.350mm
3.5	5.600mm
3.7	5.000mm
4	4.750mm
5	4.000mm
6	3.350mm
7	2.800mm
8	2.360mm
10	2.000mm
12	1.700mm
14	1.400mm
16	1.180mm
18	1.000mm
20	850µm
25	710µm

Model No.	Opening Size		
30	600µm		
35	500µm		
40	425µm		
45	355µm		
50	300µm		
60	250µm		
70	212µm		
-	200µm		
80	180µm		
-	160µm		
100	150µm		
120	125µm		
140	106µm		
Pan & Cover			
Frame Size: 203mm (Dia) x 41mm (H)			

