

Laboratory Furnace (+1700°C)

Serving the Scientific, Medical and Research industries since 1945

LABEC

LABEC +1700°C Laboratory Furnaces

are manufactured in Australia with high quality stainless steel for easy maintenance and excellent durability. The double skinned construction with fan cooling exterior keeps the exterior body cool at high temperatures and provides excellent stability.

The furnace features light weight ceramic fibre insulation for rapid thermal cycling and heating by Molybdenum disilicide elements which allow for rapid heating and cooling and provide a superior element life. The furnace features a rear vent port for natural venting or gas purging.

The door is firmly held closed with adjustable side locking latch and has a safety cut off when the door is opened during operation.

Controller


A digital microprocessor based PID temperature controller controls the temperature within the range +300°C to +1700°C.

Data logging

When optioned the controller can be connected via RS232/RS485 communication ports which can be connected directly to a data logger or computer to collect this information. Software is available for programming and monitoring.

Additional options

To suit your requirements the addition of options such as programmable controllers, timers and access ports are also available.

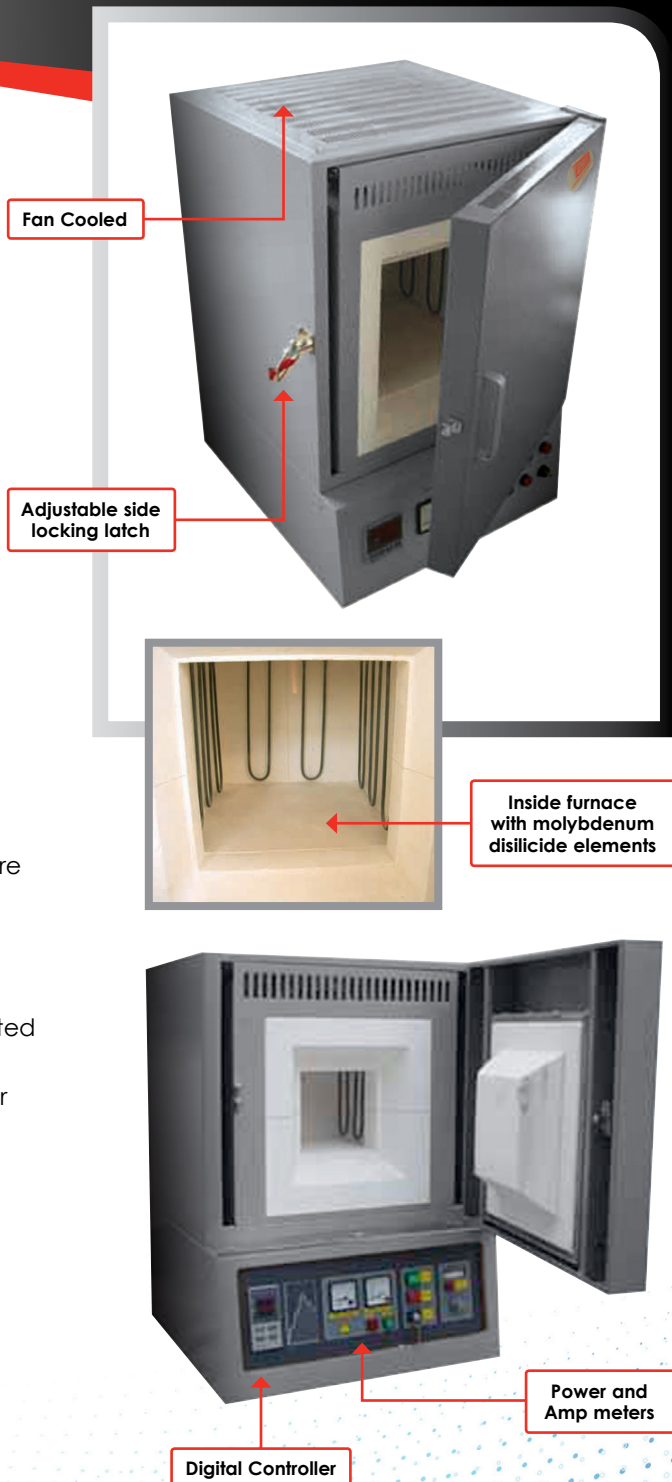

LABEC

Laboratory Equipment Pty Ltd

Laboratory Equipment Pty Ltd

email: sales@labec.com.au

Ph: 02 9560 2811 • Fax: 02 9560 6131

www.labec.com.au

SPECIFICATIONS

Laboratory Furnace (+1700°C)

Model	HT04/17	HT08/17	HT16/17	HT32/17	HT64/17
Capacity (litres)	4 litres	7 litres	16 litres	32 litres	64 litres
Int. Dim. (mm) WxHxD	150 x 150 x 150	150 x 150 x 300	200 x 260 x 300	200 x 260 x 600	400 x 400 x 400
Ext. Dim. (mm) WxHxD	700 x 470 x 450	700 x 470 x 550	750 x 580 x 550	750 x 580 x 750	1050 x 1750 x 700
Temp. Min	300°C				
Temp. Max	1700°C				
Temp. Controller	Digital PID Controller				
Temp. Setting Accuracy	1°C				
Temp. Fluctuation	+/- 1%				
Temp. Sensor	Type B				
Heating System	Molybdenum Disilicide Elements				
Interior Material	Ceramic Lined				
Exterior Material	Stainless Steel				
Options	Programmable controllers, timers, access ports. Safety lift up door, cantilever door, higher temperature models available.				
Safety Features	Over temperature safety controller, earth leakage breaker (ELB).				
Power Supply	240 (V)			415 (V)	
Power	32 AMPS			32 AMPS	
Weight (kg)	100	120	130	150	180

Serving the Scientific, Medical and Research industries since 1945

LABEC



Laboratory Equipment Pty Ltd

Laboratory Equipment Pty Ltd

email: sales@labec.com.au

Ph: 02 9560 2811 • Fax: 02 9560 6131

www.labec.com.au